安装孔尺寸 Mounting hole size:Φ19mm
开关额定值 Switch rating:3A/250VAC
开关组合 Switch combination:1NO
操作类型 Operation types:自复式 Resetable
头部形状 Head shape:平形 flat
外壳材料:黄铜镀镍/不锈钢
Enclosure material:Nickel plated brass/Stainless stell
防护等级 Degree of protection:IP65,IK08

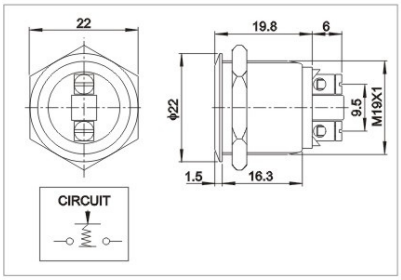

安装孔尺寸 Mounting hole size:Φ19mm
开关额定值 Switch rating:3A/250VAC
开关组合 Switch combination:1NO
操作类型 Operation types:自复式 Resetable
头部形状 Head shape:圆形 Round
外壳材料:黄铜镀镍/不锈钢
Enclosure material:Nickel plated brass/Stainless stell
防护等级 Degree of protection:IP65,IK08

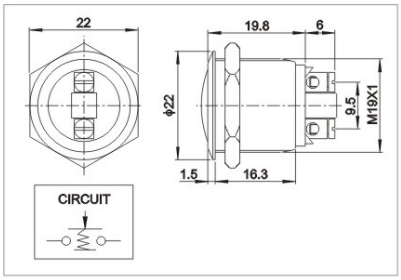

安装孔尺寸 Mounting hole size:Φ19mm
开关额定值 Switch rating:3A/250VAC
开关组合 Switch combination:1NO
操作类型 Operation types:自复式 Resetable
头部形状 Head shape:高平形 High flush
外壳材料:黄铜镀镍/不锈钢
Enclosure material:Nickel plated brass/Stainless stell
防护等级 Degree of protection:IP65,IK08

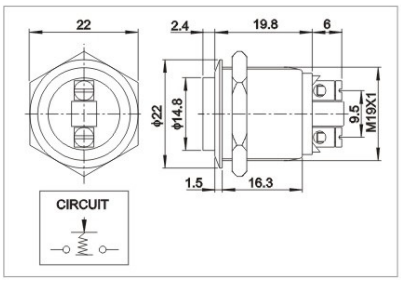

产品规格		Specifications	QN19-A1	QN19-A2	QN19-A3
尾部配置		Tail configuration	接线柱 Wiring terminal	接线柱 Wiring terminal	接线柱 Wiring terminal
开关规格		Switch specifications	3A/250VAC	3A/250VAC	3A/250VAC
接触电阻		Contact resistance	≤50mΩ	≤50mΩ	≤50mΩ
绝缘电阻		Insulation resistance	≥1000MΩ	≥1000MΩ	≥1000MΩ
绝缘强度		Dielectric Intensity	2000VAC	2000VAC	2000VAC
环境温度		Ambient temperature	−20℃ ~ +55℃	−20℃ ~ +55℃	−20℃ ~ +55℃
机械寿命		Mechanical life	50万次以上 500,000 cycles	50万次以上 500,000 cycles	50万次以上 500,000 cycles
电气寿命		Electrical life	5万次以上 50,000 cycles	5万次以上 50,000 cycles	5万次以上 50,000 cycles
面板厚度		Panel thickness	1 ~ 10mm	1 ~ 10mm	1 ~ 10mm
螺母扭矩		Nut torque	5 ~ 14Nm	5 ~ 14Nm	5 ~ 14Nm
操作压力		Operation pressure	约4N About 4N	约4N About 4N	约4N About 4N
操作行程		Operation stroke	约1.8mm About 1.8mm	约1.8mm About 1.8mm	约1.8mm About 1.8mm
防护等级		Protection level	IP65，IK08	IP65，IK08	IP65，IK08
材料 Material	触点	Contact	银合金 Silver alloy	银合金 Silver alloy	银合金 Silver alloy
	按键	Button	黄铜镀镍/不锈钢 Nickel plated brass/stainless stell	黄铜镀镍/不锈钢 Nickel plated brass/stainless stell	黄铜镀镍/不锈钢 Nickel plated brass/stainless stell
	外壳	Enclosure	黄铜镀镍/不锈钢 Nickel plated brass/stainless stell	黄铜镀镍/不锈钢 Nickel plated brass/stainless stell	黄铜镀镍/不锈钢 Nickel plated brass/stainless stell
	基座	Base	PA66	PA66	PA66