


品质来自完美的细节 Quality come from perfect details

材质 Material:



- PA 尼龙66,防火等级94V-2阻燃, 抗溶性, 抗冲击力好, 工作温度:-30°C~110°C
- ABS 耐热性,耐低温, 阻燃, 高强度,抗冲击力好, 工作温度:-20°C~70°C
- 黄铜、螺丝质铁质表面镀锌
- 适用电压范围: 250-450V
- 底座颜色, 参照图片,特殊颜色欢迎订做
- PA, Polyamide 66, 94-2 grade. Inflamming retarding, Working Temperature: -30°C to 110°C .
- ABS, good resist dissolve, good bounce impact fore. Working Temperature: -20°C to 100°C .
- Brass. Screw is iron plated zinc.
- Voltage:250-450V.
- Color: according sample picture or customized.

A

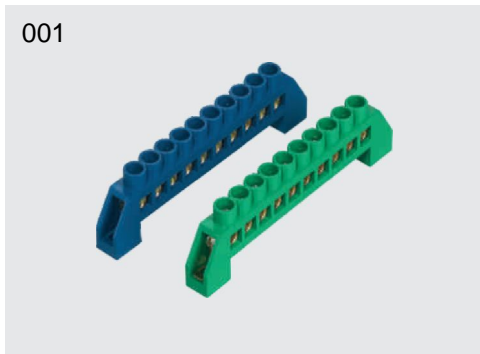



001

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
4	6 × 9	36	59.5	48.5	29	11	6	M4 × 7	PA、ABS
6	6 × 9	53	76.5	65.5	29	11	6	M4 × 7	PA、ABS
8	6 × 9	70	93.5	82.5	29	11	6	M4 × 7	PA、ABS
10	6 × 9	87	110.5	99.5	29	11	6	M4 × 7	PA、ABS
12	6 × 9	105	127.5	116.5	29	11	6	M4 × 7	PA、ABS
4	8 × 12	44	59.5	48.5	32	12.5	7	M5 × 10	PA、ABS
6	8 × 12	54	76.5	65.5	32	12.5	7	M5 × 10	PA、ABS
8	8 × 12	71	93.5	82.5	32	12.5	7	M5 × 10	PA、ABS
10	8 × 12	87	110.5	99.5	32	12.5	7	M5 × 10	PA、ABS
12	8 × 12	105	127.5	116.5	32	12.5	7	M5 × 10	PA、ABS

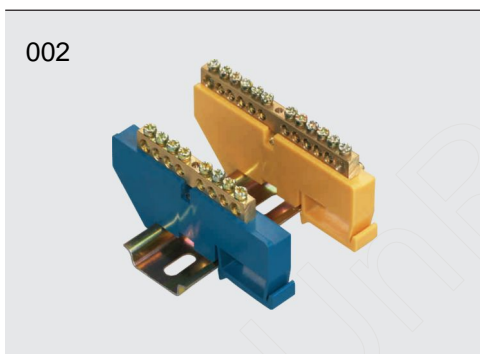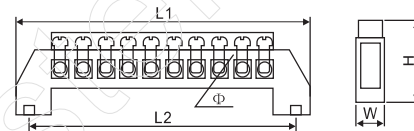

002

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
8	6 × 9	60	90	35	43	12	5.2	M4 × 7	PA、ABS
10	6 × 9	73	90	35	43	12	5.2	M4 × 7	PA、ABS
12	6 × 9	86	90	35	43	12	5.2	M4 × 7	PA、ABS
14	6 × 9	99	90	35	43	12	5.2	M4 × 7	PA、ABS
8	8 × 12	71	90	35	46	12	6.5	M5 × 10	ABS、PE
10	8 × 12	87	90	35	46	12	6.5	M5 × 10	ABS、PE
12	8 × 12	103	103	35	46	12	6.5	M5 × 10	ABS、PE
14	8 × 12	119	119	35	46	12	6.5	M5 × 10	ABS、PE

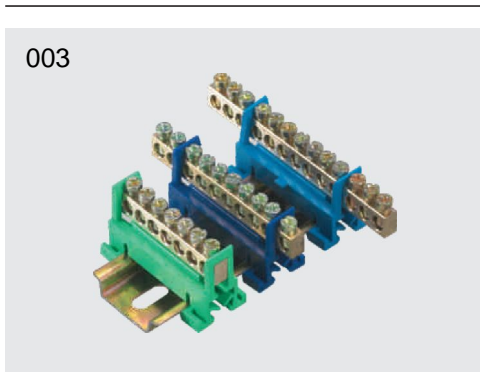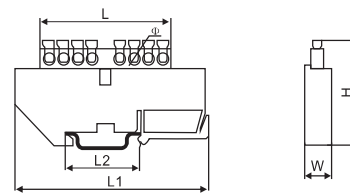

003

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh								
7	6 × 9	51	51	35	28	22	5.3	M5 × 8	PA
8	6 × 9	59	59	35	28	22	5.3	M5 × 8	PA
10	6 × 9	72	72	35	28	22	5.3	M5 × 8	PA
12	6 × 9	85	85	35	28	22	5.3	M5 × 8	PA

