


品质来自完美的细节 Quality come from perfect details


材质 Material:

- PA 尼龙66,防火等级94V-2阻燃, 抗溶性, 抗冲击力好, 工作温度:-30°C~110°C
- ABS耐热性, 耐低温, 阻燃, 高强度, 抗冲击力好, 工作温度:-20°C~70°C
- PE 聚乙烯良好的柔韧性、透明度、延伸性、抗溶性、耐辐射; 工作温度:-40°C~65°C
- 黄铜、螺丝质铁质表面镀锌
- 适用电压范围: 250-450V
- 底座颜色, 参照图片, 特殊颜色欢迎订做


- PA, Polyamide 66, 94-2 grade. Inflaming retarding, Working Temperature: -30°C to 110°C .
- ABS, good resist dissolve, good bounce impact fore. Working temperature: -20°C to 70°C .
- PE. Polypropylene, Inflaming retarding, low transparency, low rigidity, good bounce impact force. Working Temperature: -30°C to 110°C.
- Brass. Screw is iron plated zinc.
- Voltage:250-450V.
- Color: according sample picture or customized.

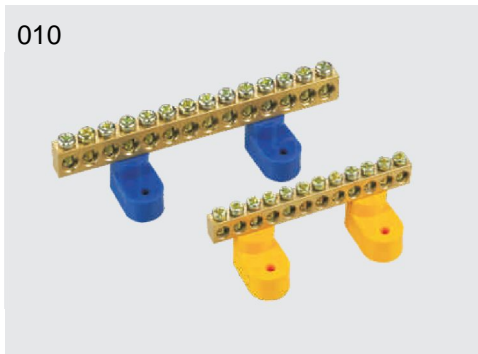

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh	mm							
6	6 × 9	42	42	19.5	28	30	5.3	M4 × 8	ABS, PE
8	6 × 9	55	55	19.5	28	30	5.3	M4 × 8	ABS, PE
10	6 × 9	68	68	32.5	28	30	5.3	M4 × 8	ABS, PE
12	6 × 9	71	71	32.5	28	30	5.3	M4 × 8	ABS, PE
14	6 × 9	84	84	32.5	28	30	5.3	M4 × 8	ABS, PE
6	8 × 12	46	46	22.5	32	30	6	M5 × 9	ABS, PE
8	8 × 12	61	61	22.5	32	30	6	M5 × 9	ABS, PE
10	8 × 12	76	76	37.5	32	30	6	M5 × 9	ABS, PE
12	8 × 12	91	91	37.5	32	30	6	M5 × 9	ABS, PE
14	8 × 12	106	106	37.5	32	30	6	M5 × 9	ABS, PE

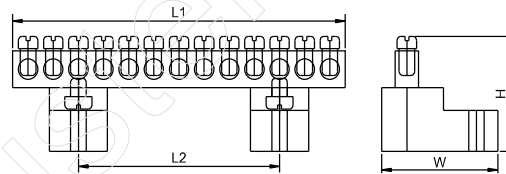

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh	mm							
7	6 × 9	51	70	35	28	23	5.3	M4 × 8	PA
8	6 × 9	59	70	35	28	23	5.3	M4 × 8	PA
10	6 × 9	72	72	35	28	23	5.3	M4 × 8	PA
12	6 × 9	85	85	35	28	23	5.3	M4 × 8	PA
15	6 × 9	104.5	104.5	35	28	23	5.3	M4 × 8	PA

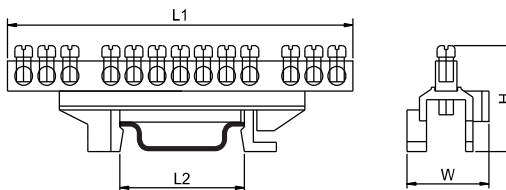

Way	Spec.	L	L1	L2	H	W	Φ	Screw Size	Plastic Setting
	Wxh	mm							
7	6 × 9	54	54	20	30	20	5.3	M5 × 8	PA

