


尼龙电缆固定头 NYLON CABLE GLANDS

- 材质: UL尼龙6/6, 防火等级94V-2, 夹紧圈为耐由橡胶材质。
- 特点: 1.夹紧圈经特殊设计, 拉力强, 对电机不造成损伤。
2.不须将固定头解体, 电缆可直接穿入上紧即可, 省时方便。
- 用途: 一般机械控制箱、配电盘、机器、电器等电缆固定用。
- Material: made from UL Nylon 66, 94V-2 and tight ring from rubber.
- Feature: 1.Special desigation, good strength and none damage to electrical machine.
2.not need to dismetgrate the fix terminal, cable can be inserted through directly then tighten easy and save time.
- Application: used for machinery control box, distribution plate, machine and electrical, etc.

编号 ITEM.NO.	D1	D2	L1	L2	L3	B1	范围 Cable range
PG-07	10.9	8.1	10.4	14.5	10.5	6.4	3.5-6
PG-09	15.3	12.2	9.9	15.8	17.2	8.6	4-8
PG-11	17.9	14.6	10.6	15.5	17.5	10.7	5-10
PG-13.5	20.2	16.2	10.3	17.8	17.9	13.3	6-12
PG-16	21.3	18.3	11.2	18.5	20.5	14.3	10-14
PG-19	24.7	20.5	11.4	18.6	21.8	15.5	12-15
PG-21	26.9	21.8	11.6	18.7	23.1	16.7	13-18
PG-24	29.8	25.0	12.1	28.3	24.1	19.2	15-22
PG-29	35.1	29.8	12.4	22.6	24.8	24.8	18-25
PG-36	44.7	37.1	12.6	25.1	26.10	30.7	22-32
PG-42	50.4	43.3	17.3	25.9	30.5	35.6	30-38
PG-48	56.1	48.2	20.9	28.1	31.5	41.4	34-44
PG-63	71	63.5	27.5	31.5	43.5	55	42-54

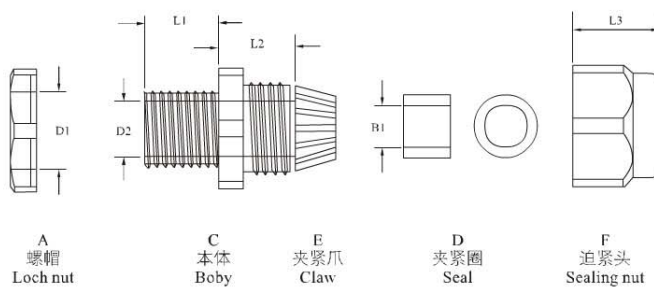

尼龙固定头 NYLON CABLE GLANDS(metric)




NYLON CABLE GLANDS



- 螺牙规格: 公制牙(METRIC)
- 颜色种类: 黑色及灰色
- 工作温度: -40℃至100℃或瞬间可耐熟至120℃。
- 安装方式: 直接安装于相同牙规之机板上, 由另一端将电缆穿入固定头通孔内, 再将迫紧螺帽上紧即可, 免拆零件省时便利。
- 产品特性: 特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大, 抗拉力特强并具保护电缆作用, 可防水、盐、耐弱酸、酒精、油油脂及一般溶剂。
- Threaded entry: Metric
- Color: black and grey
- Working temperature: -40℃~100℃, the item can also endure 120℃ instantly
- Protection: IP68
- Standard: IEC698

编号 ITEM.NO.	Threaded entry metric (mm)	Cable range φ (mm)	D1	Panel mounting hole (mm)	L1	L3	A (mm)
M-12	M12×1.25	7.6-4.6	12	12.5	8.5	19	18
M-16	M16×1.5	10-6	16	16.5	15	22	22
M-20	M20×1.5	14-9	20	20.5	15	27	27
M-25	M25×1.5	18-13	25	25.5	15	33	33
M-32	M32×1.5	25-18	32	33	15	41	41
M-40	M40×1.5	30-24	40	41	20	50	50
M-50	M50×1.5	39-30	50	51	22	62	61
M-63	M63×1.5	48.5-40	63	64	25	75	75

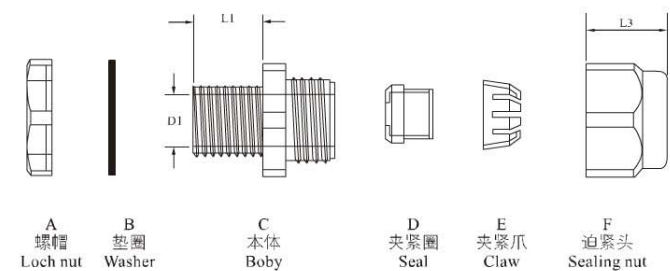

PG系列电缆接头
NYLON CABLE GLANDS(copper)

规格 Size	适用电缆 Cable Range	螺纹外径 Thread O.D.	螺纹长度 Thread Length	扳手径 Spanner Size	包装 Std.Pkg.Purchase
PG7	3~6.5	12.5	5	14	10
PG9	4~8	15.2	6	17	10
PG11	5~10	18.6	6	20	10
PG13.5	6~12	20.4	6.5	22	10
PG16	10~14	22.5	6.5	24	10
PG21	13~18	28.3	7	30	10
PG29	18~25	37	8	40	8
PG36	22~32	47	8	50	-
PG42	32~38	54	9	57	-
PG48	37~44	59.3	10	64	-



M系列电缆接头
NYLON CABLE GLANDS(copper)

规格 Size	适用电缆 Cable Range	螺纹外径 Thread O.D.	螺纹长度 Thread Length	扳手径 Spanner Size	包装 Std.Pkg.Purchase
M12	3~6.5	12	5	14	10
M16	4~8	16	6	20	10
M20	5~10	20	6	24	10
M25	6~12	25	7	30	10
M32	18~25	32	8	40	8
M40	22~32	40	8	50	-
M50	32~38	50	9	57	-
M63	37~44	63	10	68	-



塑料电缆旋紧件 - 国际标准PG/M型
PLAXSTIC CABLE PACK-INTERNATIONAL STANDARD PG/M

AG PG	适用 mm	GL mm	H mm	d mm	φ mm
7	3-6.5	8	60	7.5	16/17
7	2-5	8	60	7.5	16/17
9	4-8	8	65	9	19/20
9	2-6	8	65	9	19/20
11	5-10	8	78	10.5	22
11	3-7	8	78	10.5	22
13.5	6-12	9	90	13	24
13.5	5-9	9	90	13	24
16	10-14	10	100	15.5	27
16	7-12	10	100	15.5	27
21	13-18	11	114	20	33/34
21	9-16	11	114	20	33/34



堵塞件PG/M型
BLOCK PACK PG/M

AG	GL mm	H mm	D mm
PG7	8.5	12.5	15
PG9	8.5	13	19
PG11	9	13	22
PG13.5	9	13	25
PG16	10.5	15	27
PG21	8.5	13.5	33
PG29	11.5	16	44
PG36	13.5	18	55
PG42	13.5	18.5	62
PG48	14.5	19.5	68



LNE-WS塑料波纹管 PLASTIC CORRUGATED PIPE



PLASTIC CORRUGATED PIPE



△说明 Product Description

- Colour: WS-PE Type Black Grey
- Material: PA、PE、PP
- Characteristic: Flexibility is high, and able to bear rubbing, able to bear suspending schooling to corrodes, fire-retardanting
- Temperature range: -20℃ ~ +100℃
- Range of application: Instrument、switch board、device fabrication、project are installed、automobile line bunch

名称	软管规格	内径×外径(mm)	包装单位(米)
PE软管	AD10.0	6.5×10.0	100
	AD13.0	10.0×13.0	100
	AD15.8	12.0×15.8	100
	AD18.5	14.3×18.5	100
	AD21.2	17.0×21.2	100
	AD25.0	20.0×25.0	50
	AD28.5	23.0×28.5	50
	AD34.5	29.0×34.5	50
	AD42.5	36.0×42.5	50
	AD54.5	48.0×54.5	25
PP软管 (阻燃)	AD10.0	6.5×10.0	100
	AD13.0	10.0×13.0	100
	AD15.8	12.0×15.8	100
	AD18.5	14.3×18.5	100
	AD21.2	17.0×21.2	100
	AD25.0	20.0×25.0	50
	AD28.5	23.0×28.5	50
	AD34.5	29.0×34.5	50
	AD42.5	36.0×42.5	50
	AD54.5	48.0×54.5	25
Pa软管 (尼龙阻燃)	AD10.0	6.5×10.0	100
	AD13.0	10.0×13.0	100
	AD15.8	12.0×15.8	100
	AD18.5	14.3×18.5	100
	AD21.2	17.0×21.2	100
	AD25.0	20.0×25.0	50
	AD28.5	23.0×28.5	50
	AD34.5	29.0×34.5	50
	AD42.5	36.0×42.5	50
	AD54.5	48.0×54.5	25

