Hydraulic tools 液压工具

- 工具具有两级速度，可由快速模具行进速度自动切换到更慢的压接速度。
- 为了顺畅的运行以及便于操作远操作舒适，工具头可以被转动 180°。
- 工具配置最大压力阀，当达到最大压力时，就能听到“喀嚓声”以警告操作员停止工作。

压接头部可以自由旋转 180 度，可在较窄地方工作。
The head could be rotated at 180° freely for narrow space working.

高强度铝合金手柄
High strength aluminum alloy handle

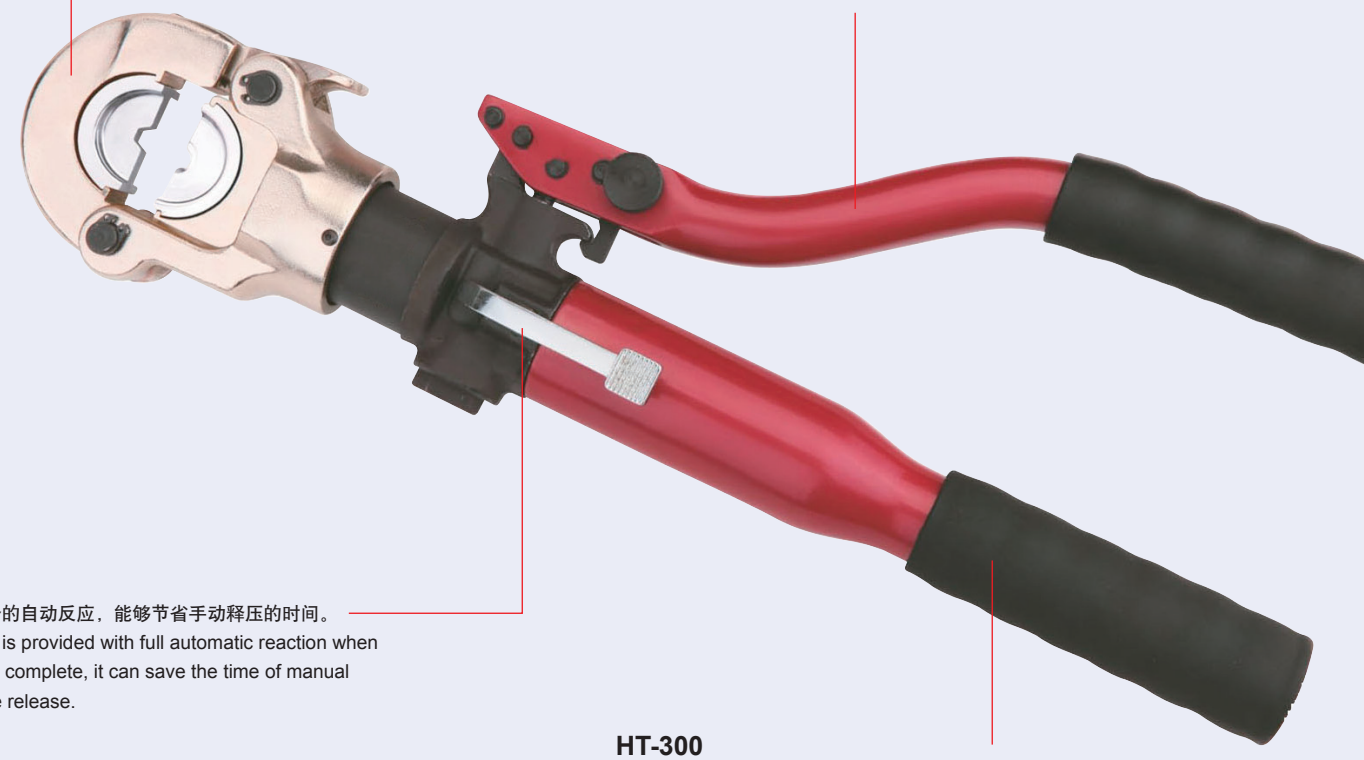

具备充分的自动反应，能够节省手动释压的时间。
The tool is provided with full automatic reaction when crimping complete, it can save the time of manual pressure release.

HT-300

防滑手柄
Prevent-slip handle

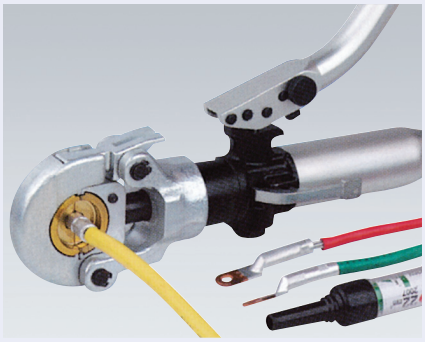

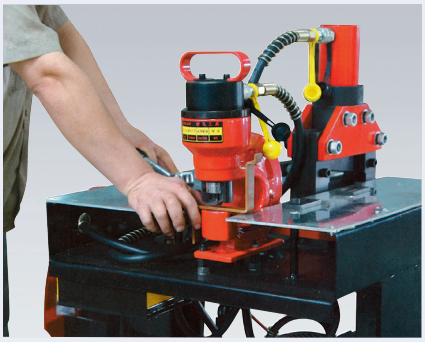

www.ezitown.com

液压压接钳 HYDRAULIC CRIMPING TOOLS

YQ-120A 快速液压钳

- 适用于输配电架空和地下电缆线钢铝端子、套管的压接。
- 采用六角型模具压接紧密、导电良好、不易脱落。
- It is applied to overthead distribution and press connection for copper terminals and sleeve of underground cable.
- Hexagonal mould is adopted to ensure tight press connection, good electric conduction and non-easy shedding.

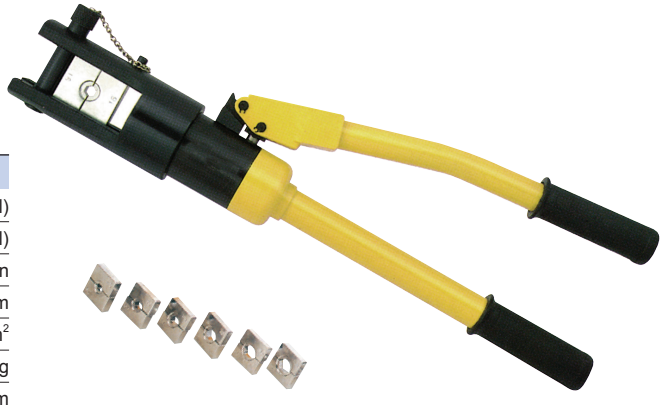

工具参数	
应用范围 Range of application	10-120mm^2(铝端子 Al Terminal)
	16-120mm^2(铜端子 Cu Terminal)
出力 Crimping force	8ton
行程 Stroke	13mm
模具配置 Standard	16,25,35,50,70,95,120mm^2
重量 Weight	4.8Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

YQ-240A 快速液压钳

- 适用于输配电架空和地下电缆线钢铝端子、套管的压接。
- 采用六角型模具压接紧密、导电良好、不易脱落。
- It is applied to overthead distribution and press connection for copper terminals and sleeve of underground cable.
- Hexagonal mould is adopted to ensure tight press connection, good electric conduction and non-easy shedding.

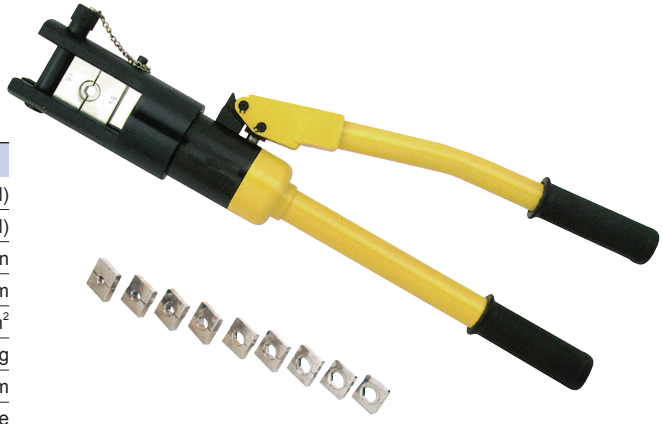

工具参数	
应用范围 Range of application	10-185mm^2(铝端子 Al Terminal)
	16-240mm^2(铜端子 Cu Terminal)
出力 Crimping force	8ton
行程 Stroke	16mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240mm^2
重量 Weight	4.8Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

YQ-300A 快速液压钳

- 适用于输配电架空和地下电缆线钢铝端子、套管的压接。
- 采用六角型模具压接紧密、导电良好、不易脱落。
- It is applied to overthead distribution and press connection for copper terminals and sleeve of underground cable.
- Hexagonal mould is adopted to ensure tight press connection, good electric conduction and non-easy shedding.

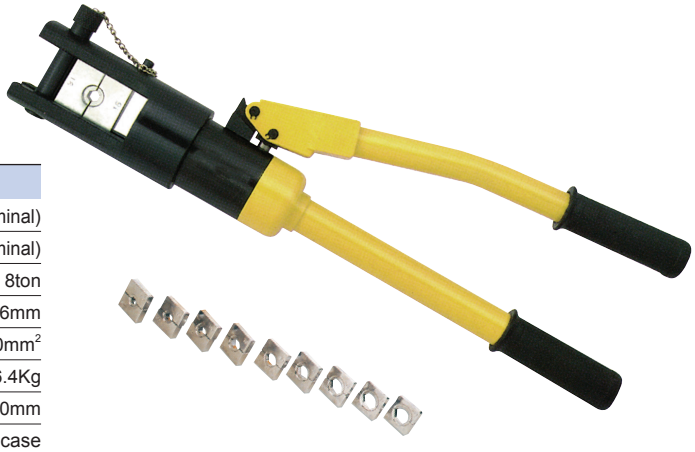

工具参数	
应用范围 Range of application	10-185mm^2(铝端子 Al Terminal)
	16-300mm^2(铜端子 Cu Terminal)
出力 Crimping force	8ton
行程 Stroke	16mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240,300mm^2
重量 Weight	6.4Kg
外箱包装尺寸 Packaging size	755x130x230mm
包装 Package	塑料箱 Plastic case

www.ezitown.com

液压压接钳 HYDRAULIC CRIMPING TOOLS

HP-120 快速液压钳

- 适用于输配电架空和地下电缆线钢铝端子、套管的压接。
- 采用六角型模具压接紧密、导电良好、不易脱落。
- It is applied to overthead distribution and press connection for copper terminals and sleeve of underground cable.
- Hexagonal mould is adopted to ensure tight press connection, good electric conduction and non-easy shedding.

工具参数	
应用范围 Range of application	8-100mm^2(铝端子 Al Terminal)
	14-150mm^2(铜端子 Cu Terminal)
出力 Crimping force	8ton
行程 Stroke	14mm
模具配置 Standard	10,16,25,35,50,70,95,120mm^2
重量 Weight	3.0Kg
外箱包装尺寸 Packaging size	415x126x65mm
包装 Package	塑料箱 Plastic case

HP-240 快速液压钳

- 适用于输配电架空和地下电缆线钢铝端子、套管的压接。
- 采用六角型模具压接紧密、导电良好、不易脱落。
- It is applied to overthead distribution and press connection for copper terminals and sleeve of underground cable.
- Hexagonal mould is adopted to ensure tight press connection, good electric conduction and non-easy shedding.

工具参数	
应用范围 Range of application	10-185mm^2(铝端子 Al Terminal)
	16-240mm^2(铜端子 Cu Terminal)
出力 Crimping force	12ton
行程 Stroke	18mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240mm^2
重量 Weight	3.8Kg
外箱包装尺寸 Packaging size	490x130x70mm
包装 Package	塑料箱 Plastic case

HP-300 快速液压钳

- 适用于输配电架空和地下电缆线钢铝端子、套管的压接。
- 采用六角型模具压接紧密、导电良好、不易脱落。
- It is applied to overthead distribution and press connection for copper terminals and sleeve of underground cable.
- Hexagonal mould is adopted to ensure tight press connection, good electric conduction and non-easy shedding.

工具参数	
应用范围 Range of application	35-240mm^2(铝端子 Al Terminal)
	50-300mm^2(铜端子 Cu Terminal)
出力 Crimping force	12ton
行程 Stroke	18mm
模具配置 Standard	50,70,95,120,150,185,240,300mm^2
重量 Weight	3.9Kg
外箱包装尺寸 Packaging size	490x130x70mm
包装 Package	塑料箱 Plastic case

液压压接钳 HYDRAULIC CRIMPING TOOLS

ZYO-400 快速液压钳

- 适用于电缆线铜铝端子套管的压接
- 采用六角型模具，压接紧密
- 带安全系统
- It is applicable crimping cable copper and aluminum terminals.
- Hexagonal mould is adopted to ensure tight press connection.
- Safety system inside.

工具参数	
应用范围 Range of application	50-300mm^2(铝端子 Al Terminal)
	70-400mm^2(铜端子 Cu Terminal)
出力 Crimping force	12ton
行程 Stroke	16mm
模具配置 Standard	50,70,95,120,150,185,240,300,400mm^2
重量 Weight	5.5Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

ZHO-300 快速液压钳

- 适用于电缆线铜铝端子套管的压接
- 采用六角型模具，压接紧密
- 带安全系统
- It is applicable crimping cable copper and aluminum terminals.
- Hexagonal mould is adopted to ensure tight press connection.
- Safety system inside.

工具参数	
应用范围 Range of application	35-240mm^2(铝端子 Al Terminal)
	16-300mm^2(铜端子 Cu Terminal)
出力 Crimping force	10ton
行程 Stroke	16mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240,300mm^2
重量 Weight	4.5Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

CPO-150S 快速液压钳

- 快速两段高、低压，当压力达到时会有“咔嚓”声提示，内设安全保护装置。
- 泵体连体设计，压接头部可以 180 度旋转。
- With two stages of high and low pressure,when the safety protection device with "crack" sound will be finished operating.
- With conjoined design of pump body,pressing head part can rotate at 180 degrees of angle.

带安全系统
Safety system inside

工具参数	
应用范围 Range of application	8-100mm^2(铝端子 Al Terminal)
	16-150mm^2(铜端子 Cu Terminal)
出力 Crimping force	10ton
行程 Stroke	14mm
模具配置 Standard	16,25,35,50,70,95,120,150mm^2
重量 Weight	4.8Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

www.ezitown.com

液压压接钳 HYDRAULIC CRIMPING TOOLS

YQ-70 快速液压钳

- 适用于输配电架空和地下电缆线钢铝端子、套管的压接。
- 采用六角型模具压接紧密、导电良好、不易脱落。
- It is applied to overthead distribution and press connection for copper terminals and sleeve of underground cable.
- Hexagonal mould is adopted to ensure tight press connection, good electric conduction and non-easy shedding.

工具参数	
应用范围 Range of application	6-70mm^2
出力 Crimping force	6ton
行程 Stroke	10mm
模具配置 Standard	公模 (母模)8-38,60-70mm^2, 公模 : 14-22,38-60,70mm^2
重量 Weight	2.5Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

EP-410 快速液压钳

- 适用于电缆线铜铝端子套管的压接
- 采用六角型模具，压接紧密。
- 压接头部可以做 180 度的旋转
- It is applicable to press connection of cable copper and aluminum terminal bushing;
- Hexagonal mould is adopted to ensure tight press connection.
- Head part can rotate at 180° degrees.

带安全系统
Safety system inside

工具参数	
应用范围 Range of application	35-240mm^2(铝端子 Al Terminal)
	50-300mm^2(铜端子 Cu Terminal)
出力 Crimping force	12ton
行程 Stroke	30mm
模具配置 Standard	50,70,95,120,150,185,240,300mm^2
重量 Weight	6.6Kg
外箱包装尺寸 Packaging size	755x130x230mm
包装 Package	塑料箱 Plastic case

EP-430 快速液压钳

- 适用于电缆线铜铝端子套管的压接
- 采用六角型模具，压接紧密
- 带安全系统
- It is applicable crimping cable copper and aluminum terminals.
- Hexagonal mould is adopted to ensure tight press connection.
- Safety system inside.

工具参数	
应用范围 Range of application	35-300mm^2(铝端子 Al Terminal)
	50-400mm^2(铜端子 Cu Terminal)
出力 Crimping force	12ton
行程 Stroke	32mm
模具配置 Standard	50,70,95,120,150,185,240,300,400mm^2
重量 Weight	6.4Kg
外箱包装尺寸 Packaging size	755x130x230mm
包装 Package	塑料箱 Plastic case