

液压压接钳 HYDRAULIC CRIMPING TOOLS

CYO-300C 快速液压钳

- 适用于电缆线铜铝端子套管的压接
- 采用六角型模具，压接紧密
- 带安全系统
- It is applicable crimping cable copper and aluminum terminals.
- Hexagonal mould is adopted to ensure tight press connection.
- Safety system inside.

工具参数	
应用范围 Range of application	35-240mm ² (铝端子 Al Terminal) 50-300mm ² (铜端子 Cu Terminal)
出力 Crimping force	12ton
行程 Stroke	30mm
模具配置 Standard	50,70,95,120,150,185,240,300mm ²
重量 Weight	6.2Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case



ZCO-300 快速液压钳

- 适用于电缆线铜铝端子套管的压接
- 采用六角型模具，压接紧密
- 带安全系统
- It is applicable crimping cable copper and aluminum terminals.
- Hexagonal mould is adopted to ensure tight press connection.
- Safety system inside.

工具参数	
应用范围 Range of application	10-240mm ² (铝端子 Al Terminal) 16-300mm ² (铜端子 Cu Terminal)
出力 Crimping force	10ton
行程 Stroke	30mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240,300mm ²
重量 Weight	5Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case



ZCO-400 快速液压钳

- 适用于电缆线铜铝端子套管的压接
- 采用六角型模具，压接紧密
- 带安全系统
- It is applicable crimping cable copper and aluminum terminals.
- Hexagonal mould is adopted to ensure tight press connection.
- Safety system inside.

工具参数	
应用范围 Range of application	50-300mm ² (铝端子 Al Terminal) 70-400mm ² (铜端子 Cu Terminal)
出力 Crimping force	12ton
行程 Stroke	32mm
模具配置 Standard	50,70,95,120,150,185,240,300,400mm ²
重量 Weight	6.5Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case




液压压接钳 HYDRAULIC CRIMPING TOOLS

QZD-400A 快速液压钳

- 该工具有两级变速的冲头，能够自动切换，可从快速前进速度切换到较慢的压接速度。
- 为了操作员简单并舒适地操作，工具头可以 180 度旋转。
- 压接完成以后，该工具具备充分的自动反应，能够节省手动释压的时间。
- 可互换的压接模具，有多种压接几何形状。
- The tool has two stages speed of the ram and automatically switches from a fast advancing speed to a slower crimping speed.
- For ease of operation and comfort the operator the tool head can be fully rotated through 180 degrees.
- The tool is provided with full automatic reaction when crimping complete, it can save the time of manual pressure release.
- With interchangeable crimping dies with multiple crimping geometry's.

工具参数


应用范围 Range of application	16-400mm ²
出力 Crimping force	10ton
行程 Stroke	16mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240,300,400mm ²
重量 Weight	6.2Kg
外箱包装尺寸 Packaging size	690x250x120mm
包装 Package	铁箱 Steel case



HT-300 快速液压钳

工具参数

应用范围 Range of application	16-300mm ²
出力 Crimping force	10ton
行程 Stroke	17mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240,300mm ²
重量 Weight	5.0Kg
外箱包装尺寸 Packaging size	690x250x120mm
包装 Package	铝合金密码箱 Aluminum alloy code case

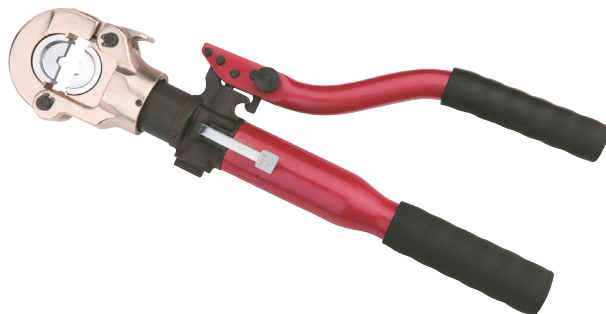


HT-51 快速液压钳

- 双速装置将压模快速送到压接管，压接力上升，然后自动转换到低速，省时又省力。
- 压接头部可以自由旋转 180 度，可在较窄地方工作。
- 内置调压阀，当压力达到设定最大压力时可自动泄压，防止工具过压。
- Dies are quickly put on tube by double speed unit. The operation finish with energy saving and time shorten.
- The head could be rotated at 180° freely for narrow space working.
- Fitted with safety valve, When pressure reaches to limited max, Value pressure release automatically to prevent over pressure.

工具参数

应用范围 Range of application	10-240mm ²
出力 Crimping force	8ton
行程 Stroke	16mm
模具配置 Standard	10,16,25,35,50,70,95,120,150,185,240mm ²
重量 Weight	2.75Kg
外箱包装尺寸 Packaging size	380x130x70mm
包装 Package	塑料箱 Plastic case

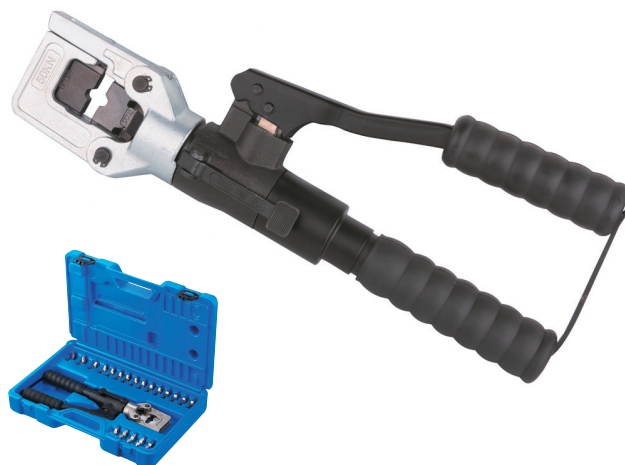

液压压接钳 HYDRAULIC CRIMPING TOOLS

FYQ-300 分体式液压钳

- 适用于输配电屋内屋外工程，各种接续金具、架空地下电缆线专业使用。
- 油管接头配 PT3/8" 牙。
- 配合脚踏泵、手压泵或电动液压泵工作。
- It is specially designed for inside and outside power transmission and distribution project, various kinds of connecting terminals, overhead and underground cabling.
- The oil pipe coupler fitted with PT 3/8" thread.
- To be worked with pedal pump, manual pump and electric driven hydraulic pump.

工具参数	
应用范围 Range of application	16-300mm ²
出力 Crimping force	17ton
行程 Stroke	22mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240,300mm ²
重量 Weight	12Kg
外箱包装尺寸 Packaging size	355x90x155mm
包装 Package	铁箱 Steel case



FYQ-400 分体式液压钳

工具参数	
应用范围 Range of application	50-400mm ²
出力 Crimping force	16ton
行程 Stroke	20mm
模具配置 Standard	50,70,95,120,150,185,240,300,400mm ²
重量 Weight	9Kg
外箱包装尺寸 Packaging size	355x90x155mm
包装 Package	铁箱 Steel case



FYQ-500B 分体式液压钳

- 适用于输配电屋内屋外工程，各种接续金具、架空地下电缆线专业使用。
- 油管接头配 PT3/8" 牙。
- 配合脚踏泵、手压泵或电动液压泵工作。
- It is specially designed for inside and outside power transmission and distribution project, various kinds of connecting terminals, overhead and underground cabling.
- The oil pipe coupler fitted with PT 3/8" thread.
- To be worked with pedal pump, manual pump and electric driven hydraulic pump.

工具参数	
应用范围 Range of application	50-500mm ²
出力 Crimping force	22ton
行程 Stroke	22mm
模具配置 Standard	50,75,95,120,150,185,240,300,400,500mm ²
重量 Weight	20Kg
外箱包装尺寸 Packaging size	-
包装 Package	铁箱 Steel case



液压压接钳 HYDRAULIC CRIMPING TOOLS

FYQ-630A 分体式液压钳

- 适用于输配电屋内屋外工程，各种接续金具、架空地下电缆线专业使用。
- 油管接头配 PT3/8" 牙。
- 配合脚踏泵、手压泵或电动液压泵工作。
- It is specially designed for inside and outside power transmission and distribution project, various kinds of connecting terminals, overhead and underground cabling.
- The oil pipe coupler fitted with PT 3/8" thread.
- To be worked with pedal pump, manual pump and electric driven hydraulic pump.

工具参数	
应用范围 Range of application	150-630mm ²
出力 Crimping force	25ton
行程 Stroke	25mm
模具配置 Standard	150,185,240,300,400,500,630mm ²
重量 Weight	28Kg
外箱包装尺寸 Packaging size	-
包装 Package	铁箱 Steel case



CO-630B 分体式液压钳

- 适用于输配电屋内屋外工程，各种接续金具、架空地下电缆线专业使用。
- 油管接头配 PT3/8" 牙。
- 配合脚踏泵、手压泵或电动液压泵工作。
- It is specially designed for inside and outside power transmission and distribution project, various kinds of connecting terminals, overhead and underground cabling.
- The oil pipe coupler fitted with PT 3/8" thread.
- To be worked with pedal pump, manual pump and electric driven hydraulic pump.

工具参数	
应用范围 Range of application	50-630mm ²
出力 Crimping force	35ton
行程 Stroke	26mm
模具配置 Standard	150,185,240,300,400,500,630mm ²
重量 Weight	17.5Kg
外箱包装尺寸 Packaging size	380x295x145mm
包装 Package	铁箱 Steel case



液压电缆剪 HYDRAULIC CABLE CUTTER

CPC-50B 液压电缆剪

- 刀片采用高强度特种钢，热处理，确保使用寿命长。
- 刀头可以很容易地打开，剪切电缆。
- 液压切割头配有快速自动的耦合器连接液压泵，工作压力的 700Mpa。
- The blades are manufactured from high strength special steel, heat treated to ensure a long service life.
- The head can be easily opened to allow the cutting of running cables.
- Hydraulic cutting head complete with quick automatic coupler for connection to a hydraulic pump with a working pressure of 700 bar max.

工具参数	
剪切范围 Cutting range	钢丝绳 Steel wire $\Phi 30\text{mm}$ 电缆线 AL/CU cable $\Phi 50\text{mm}$, 钢芯铝绞线 ACSR $\Phi 50\text{mm}$
出力 Cutting force	9ton
长度 Length	310mm
重量 Weight	3.0Kg
外箱包装尺寸 Packaging size	355x90x195mm
包装 Package	铁箱 Steel case



CC-50B 液压电缆剪

- 刀片采用高强度特种钢，热处理，确保使用寿命长。
- 刀头可以很容易地打开，剪切电缆。
- 液压切割头配有快速自动的耦合器连接液压泵，工作压力的 700Mpa。
- The blades are manufactured from high strength special steel, heat treated to ensure a long service life.
- The head can be easily opened to allow the cutting of running cables.
- Hydraulic cutting head complete with quick automatic coupler for connection to a hydraulic pump with a working pressure of 700 bar max.

工具参数	
剪切范围 Cutting range	电线 Electrical wire $\Phi 50\text{mm}$ 电话电缆线 Tel cable or AL/CU cable $\Phi 50\text{mm}$
出力 Cutting force	12ton
长度 Length	445mm
重量 Weight	6.0Kg
外箱包装尺寸 Packaging size	355x90x195mm
包装 Package	铁箱 Steel case



CPC-100A 液压电缆剪

- 刀片采用高强度特种钢，热处理，确保使用寿命长。
- 刀头可以很容易地打开，剪切电缆。
- 液压切割头配有快速自动的耦合器连接液压泵，工作压力的 700Mpa。
- The blades are manufactured from high strength special steel, heat treated to ensure a long service life.
- The head can be easily opened to allow the cutting of running cables.
- Hydraulic cutting head complete with quick automatic coupler for connection to a hydraulic pump with a working pressure of 700 bar max.

工具参数	
剪切范围 Cutting range	铠装电缆 Armoured AL/CU cable $\Phi 75\text{mm}$ 电缆线 AL/CU cable $\Phi 100\text{mm}$
出力 Cutting force	9ton
长度 Length	590mm
重量 Weight	13Kg
外箱包装尺寸 Packaging size	600x90x240mm
包装 Package	木箱 Wooden case

