




**Use**

Many stages selector switch is a multi-purpose products, from the power switch CNC control panel, can be widely used. The power switch, due to the use of high voltage, itself is high current so should use the silver contact alloy in the control panel, because of the CNC itself is low voltage and low current so should use, due to the different gold joints shall use for products, and distinguish between pathologic will clearly marked likelihood ratio increases damage to the disciples, or contact adverse circumstances, in this company is introduced, the more suitable type, don't force, in blue and white/zone between two colors of high voltage and low voltage, high current and low current period can achieve the effect of work, and improve the service life of product.

**Ratings**


	Low voltage and low current With the white (contacts seat)	High voltage, high current With the white (contacts seat)
Pick spots capacity	24V 0.1A	600V 15A
Contact impedance	During the early 10mΩbelow	During the early 50mΩbelow
Voltage	2200VAC	1 minute
Insulation impedance	10mΩAbove	500VAC
Life	Machinery: 100, 000Back to the above Electrical: 100, 000Back to the above	

Operating mode	Manual reset	Automatic reset
Switch angles	30°、45°、60°、90°	45°
Switching number	2-12	2-3

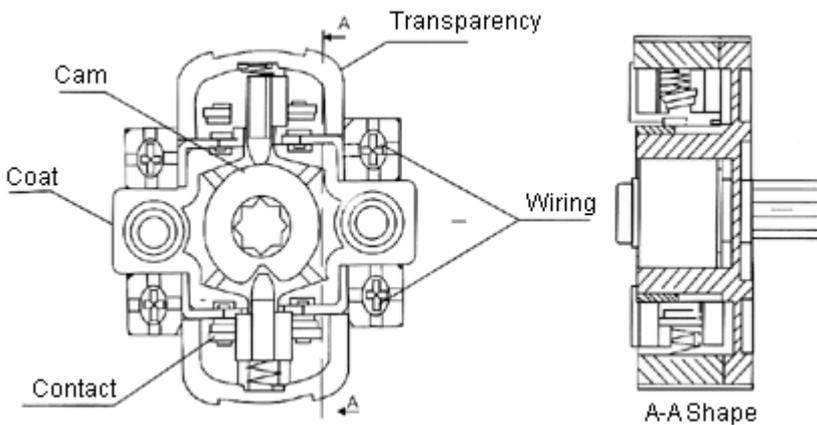


**Fixed size hole**

Repeatedly	1	2	3	4	5	6	7	8	9	10
A/Length	40	55.5	71.5	6.5	102	11	133	148	164	179

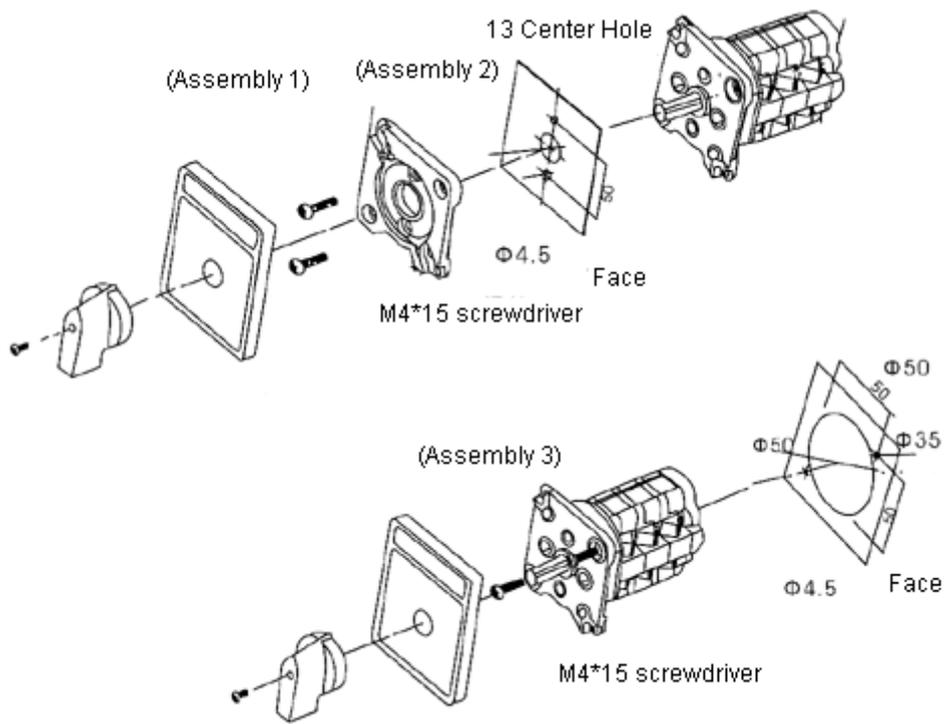


Install size and shape

Size Chart (new products)




CS-68-52

Fixed Hole

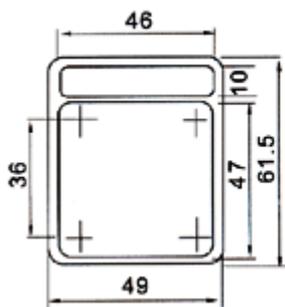

(Assembly 3)

All were 5mm diamete

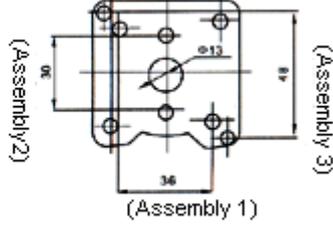

CS-68-36

