




METER SOCKET BOX

MODEL NO.:	HDB-HRMB-100
IP DEGREE:	NO STANDARD
CATEGORY:	DISTRIBUTION BOX
Line and load lugs:	1/0 MAX, Cu-Al
Rating:	100 Amp Continuous Duty, 600Vac
Bypass:	None
Mounting:	Surface, pole outdoor NEMA 3R
Sealing ring:	Stainless steel, Sold Separately
Hub or hub plate:	Fixed, top and bottom
Interior:	Units are supplied with four terminals
Connectors:	Made of carbon steel; screw-type
Jaws:	Heavy duty tin plated copper jaw
Blocks:	The meter jaw mounting block molded glass-filled polyester with CTI rating of 190
Enclosure:	Die-cast aluminum with gray cathodic
Locking:	Sealing ring has lock provision
MATERIAL:	CS
FINISHING	epoxy powder finish
Key words	Meter box, Meter socket, meter base, Milbank

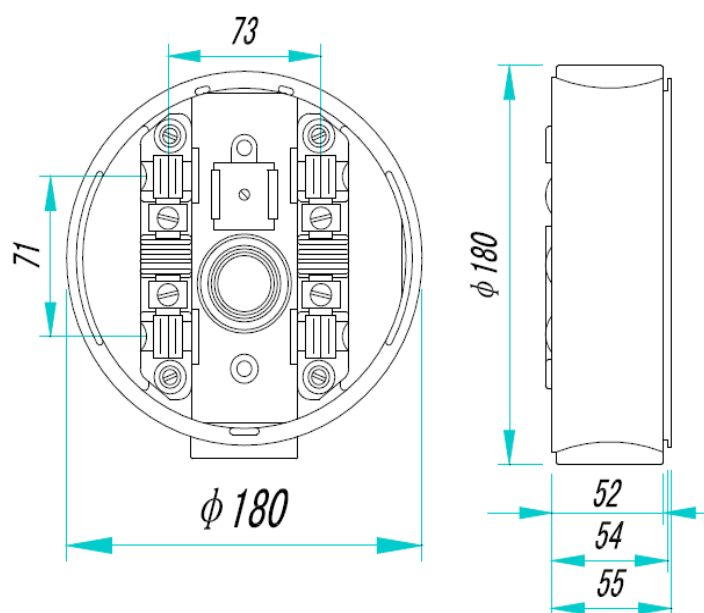

SR-100



SRN-100

MODEL NO.:	Description	Length of terminal	Fix Hubs size	Stds Pack
HRMB-100B	1 Ph 100A 4 jaws	4 mm	1/2"	30
HRMB-100C	1 Ph 100A 4 jaws	4 mm	3/4"	30
HRMB-100D	1 Ph 100A 4 jaws	4 mm	1"	30
HRMB-100E	1 Ph 100A 4 jaws	4 mm	1-1/4"	30
HRMB-100B	1 Ph 100A 4 jaws	10 mm	1/2"	30
HRMB-100C	1 Ph 100A 4 jaws	10 mm	3/4"	30
HRMB-100D	1 Ph 100A 4 jaws	10 mm	1"	30
HRMB-100E	1 Ph 100A 4 jaws	10 mm	1-1/4"	30

Stainless Steel Sealing Ring		
Cat. No.	SR-100	SRN-100
Description	Snap Type	Screw Type
Thickness	0.35 mm	0.37 mm
Stds Pack	120	120



MODEL NO.: HDB-HSMB/HTMB-200

FEATURES:

- 1.Manufactured from pre-treated galvanized steel
- 2.Electrostatically applied epoxy Powder finish
- 3.Ample gutter space for easy wiring
- 4.Convenient knockouts in the side back and bottom
- 5.Lay in type terminals with pressure plates for easy connections
- 6.Designed for 240V and 600 Volts Max
- 7.All Hubs Size supplied upon request, Sold Separated
- 8.Copper connect,1.2mm CS .new alu base.



HSMB-200



MODEL NO.	Description	Stds Pack	Dimensions H W D
HSMB-200/4J	1 Ph 200A, 4 jaws ring type	6	382 218 137
HSMB-200/4J-L	1 Ph 200A, 4 jaws ringless	6	382 218 137
HSMB-200M/4J-L	1 Ph 200A, 4 jaws ringless	4	398 284 115
HTMB-200/7J	3 Ph 200A, 7 jaws ring type	4	382 218 137
HTMB-200/7J-L	3 Ph 200A, 7 jaws ringless	4	382 218 137



HSMB-200

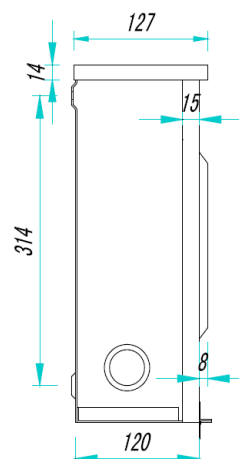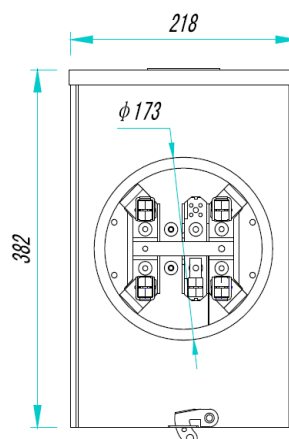

HTMB-200



HTMB-200M



MODEL NO.: HSMB-100/125

Features:

- 1.Manufactured from pre-treated galvanized steel
- 2.Electrostatically applied epoxy Powder finish
- 3.Ample gutter space for easy wiring
- 4.Convenient knockouts in the side back and bottom
- 5.Lay in type terminals with pressure plates foe easy connections
- 6.Designed for 240V and 600 Volts Max
- 7.All Hubs Size supplied upon request, Sold Separated

HTMB-100



MODEL NO.	Description	Dimension H W D	Stds pack
HSMB-100/4J	1Ph 100A, 4 jaws ring type	230 195 108	12
HTMB-100/7J	3Ph 100A, 7 jaws ringless	375 212 116	6
HSMB-125/4J	1Ph 125A, 4 jaws ringless	278 212 116	8
HSMB-125/5J	1Ph1 25A, 5 jaws ringless	278 212 116	8





HSMB-100



HSMB-100



HSMB-125

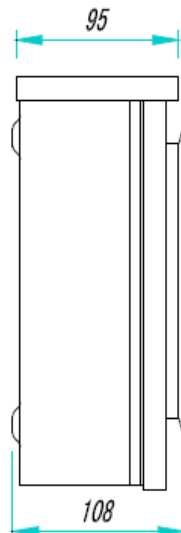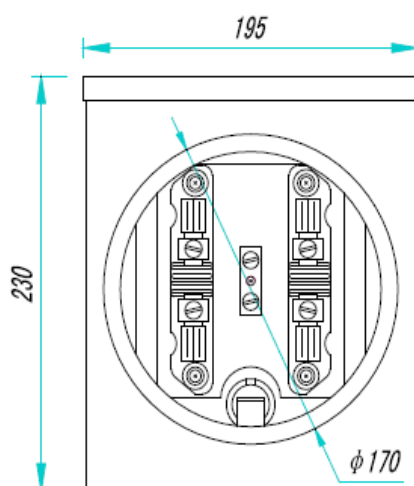




HMBC-100/200

Features:

- 1.Manufactured from pre-treated galvanized steel
- 2.Ample gutter space for easy wiring
- 3.Supplied with main lugs and neutral lug as standard
- 4.Available single phase 3 wire configurations
- 5.Designed to match GE molded case circuit breakers
- 6.Meter centres are standard bottom entry
- 7.Provision for hubs made on all top entry meter centres

HMBC-100/4T

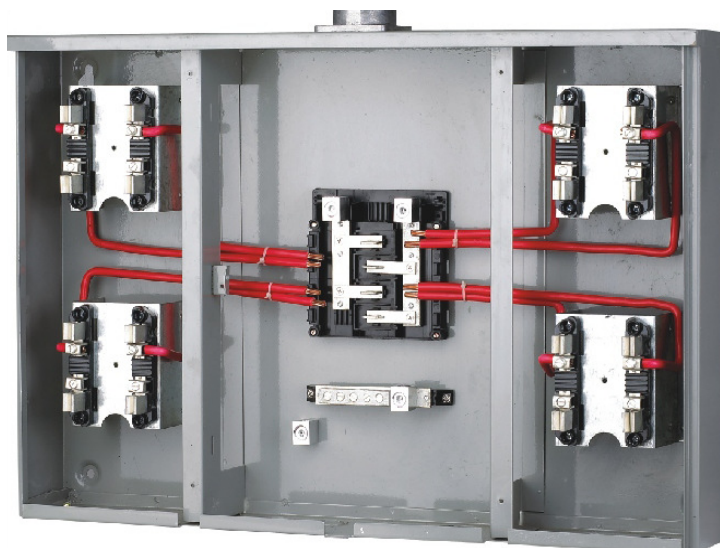

Cat. No.	Description	H W D	Circuit breaker
HMBC-100/2T	1 Ph 2 stack 2x100A with 4 jaws base	505 475 130	THQL
HMBC-100/3T	1 Ph 3 stack 3x100A with 4 jaws base	560 750 130	THQL
HMBC-100/4T	1 Ph 4 stack 4x100A with 4 jaws base	560 750 130	THQL
HMBC-200/2T	1 Ph 2 stack 2x200A with 4 jaws base	505 615 155	TQD



Model	HUB-100	HUB-125	HUB-150	HUB-200
Size	1 inch	1-1/4 inch	1-1/2 inch	2 inch



HMBC-100/4T



HMBC-100/2T

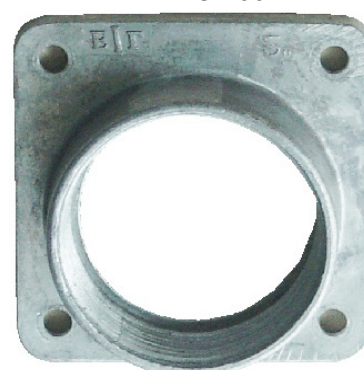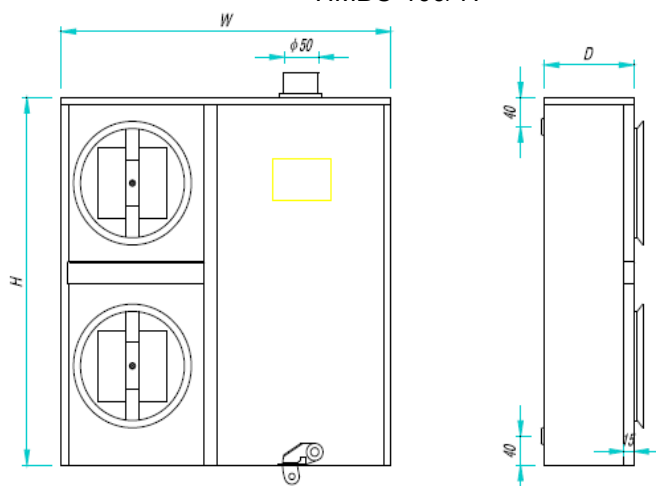

HUB



HMBC-100/200

Features:

- 1.Manufactured from pre-treated galvanized steel
- 2.Ample gutter space for easy wiring
- 3.Supplied with main lugs and neutral lug as standard
- 4.Available single phase 3 wire configurations
- 5.Designed to match GE molded case circuit breakers
- 6.Meter centres are standard bottom entry
- 7.Provision for hubs made on all top entry meter centres

HMBC-200/2T



Model No.	Description	DimensionsH W D	Mat
HMBC-100V	Vertica,1Ph,100A,4 jaw ring type	435 200 100	THQL
HMBC-100H	Horizaontal,1Ph,100A,4 jaw ring type	300 480 150	THQL

METER SOCKET


HMBC-100/200

Features:

- 1.Outdoor,meter breaker combination
- 2.Manufactured from pre-treated galvanized steel
- 3.Ample gutter space for easy wiring
- 4.Designed to match GE Moulded case circuit breakers
- 5.Provision for hubs made on all top entry meter socket



HMBC-100H

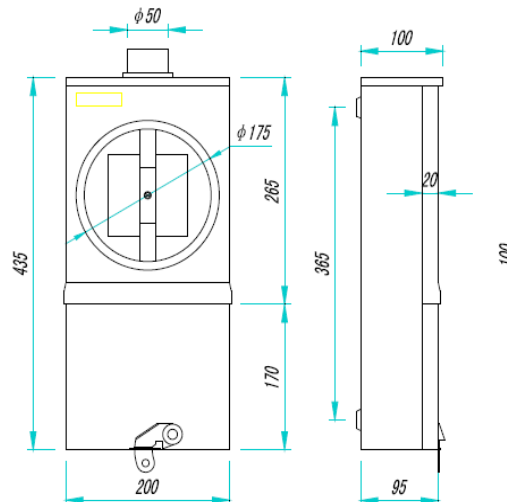

HMBC-100V

Model No.	Description	DimensionsH W D	Match Breaker
HMBC-100V	Vertica,1Ph,100A,4 jaw ring type	435 200 100	THQL
HMBC-100H	Horizaontal,1Ph,100A,4 jaw ring type	300 480 150	THQL