



FS4 Series

4 Pole IP66 Enclosure


>>> WWW.EZITOWN.COM



Description

It offers maximum 4 pole space to accommodate MCB, RCD or MCB/RCD combination. its cover assemblies suits all 66series mounting back box.

Deep cover of A66CB4N provides ample wiring room above and below the din rail.

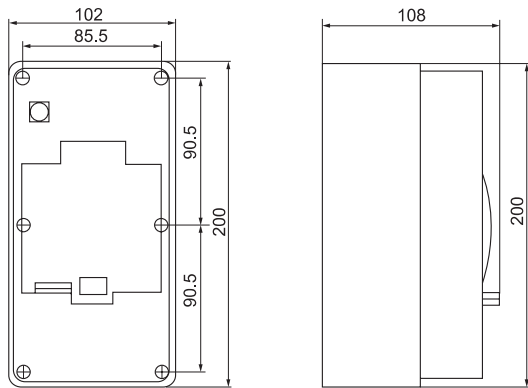

Approvals

CE

Technical Parameter

- ※ Ratea Voltage:250/440V AC
- ※ Ratea Frequency:50/60Hz
- ※ IP Protection:IP66

Specification

Cat No.	Description	Module Type	IP Rating
FS4-1N	available for 1 to 4 pole, with neon lamp	MCB+RCD's	IP66
FS4-2N	available for 1 to 4 pole, with neon lamp	MCB+RCD's	IP66
FS4-3N	available for 1 to 4 pole, with neon lamp	MCB+RCD's	IP66
FS4-4N	available for 1 to 4 pole, with neon lamp	MCB+RCD's	IP66





UKF Series


Weather Protected Switch

>>> WWW.EZITOWN.COM



General

- ※ Cables looped in and out from overhead
- ※ In and out from underground
- ※ In and out straight through the switch
- ※ two 25mm rear knockouts are moulded in the base for surface mounting with concealed wiring.

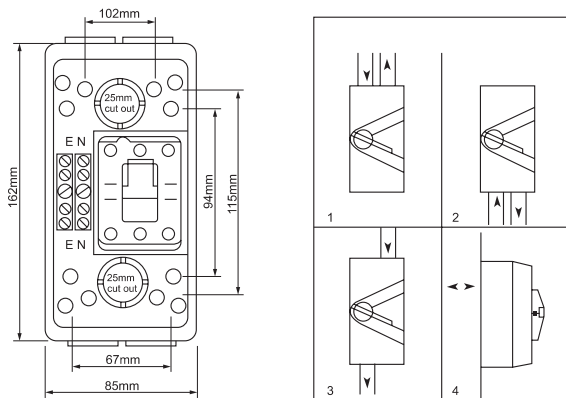

Dual 25mm screwd conduit entries top and bottom (up to 55amp.) allows four ways to surface wire the switch.

Products Available

IP Rating

UKF1-20	20A 500V Single pole surface switch. Terminals accommodate 16mm ² cable. M Rating 220	56
UKF1-35	35A/63A 250V Single pole. Terminals accommodate mm ² cable. M rating 220	56
UKF1-63		

Products Available

IP Rating

UKF2-20	20A 440V double. Trminals accommodate 16mm ² cables. M Rarting 180.	56
UKF2-35	35A 440V double. Trminals accommodate 16mm ² cables. M Rarting 180.	56
UKF2-63	63A 400V double. Trminals accommodate 16mm ² cables. M Rarting 180.	56

Products Available

IP Rating

UKF3-20	20A 440V Tripe Pole. Trminals accommodate 16mm ² cables. M Rarting 180.	56
UKF3-35	35A 440V Tripe Pole. Trminals accommodate 16mm ² cables. M Rarting 180.	56
UKF3-63	55A 440V Tripe Pole. Trminals accommodate 16mm ² cables. M Rarting 180.	56
UKF4-20	20A 440V Tripe Pole. Trminals accommodate 16mm ² cables. M Rarting 180.	56
UKF4-35	35A 440V Tripe Pole. Trminals accommodate 16mm ² cables. M Rarting 180.	56
UKF4-63	55A 440V Tripe Pole. Trminals accommodate 16mm ² cables. M Rarting 180.	56
UKF3-55-32CE	55A 440V Tripe Pole. With 32mm conduit entry at each end Trminals accommodate 16mm ² cables. M Rarting 160.	56
UKF3-63-32CE	63A 440V Tripe Pole. With 32mm conduit entry at each end Trminals accommodate 16mm ² cables. M Rarting 160.	56